

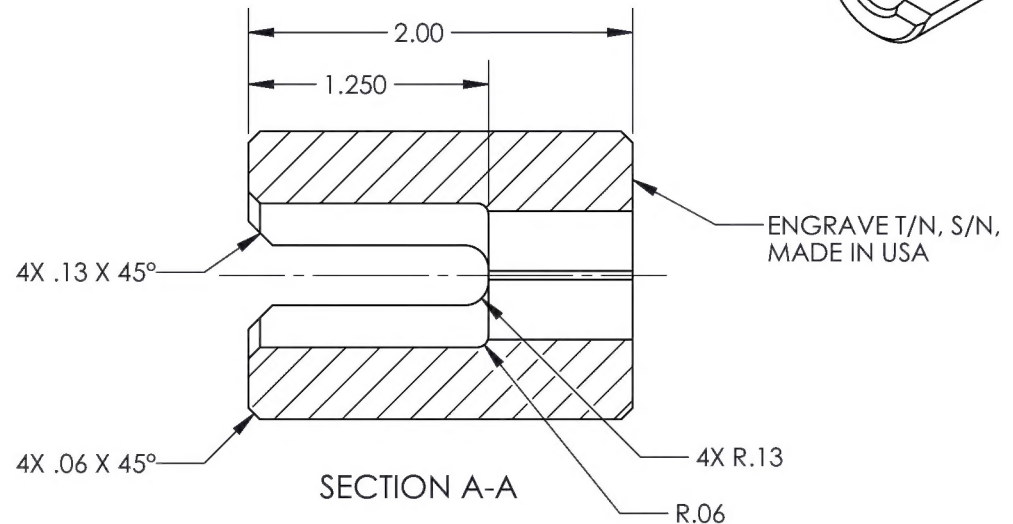


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		CH'D TITLEBLOCK, BOM, REVISION TABLE, ENGRAVE NOTE AND RADIUS FROM .060.	12/5/2011	RJC	GE
2	15-0328	CH'D DIMS WAS Ø1.500 IS Ø1.50, WAS 2.000 IS 2.00, WAS R.062 IS R.06, WAS R.125 IS 4X R.13, WAS .06 X 45° IS 4X .06 X 45°, WAS .500 SQUARE BROACH (17/32 PILOT HOLE) IS 2X .508-.503.	10/8/2015	RJC	JAG

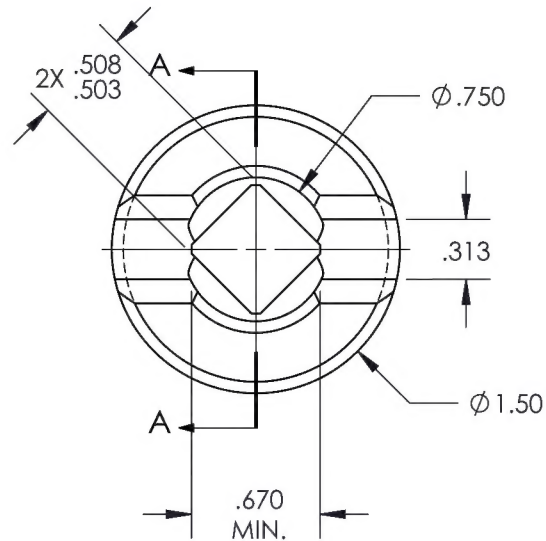

NOTE:  
1. TORQUE WRENCH ADAPTER-UPPER END CAP.  
2. USED WITH 269A6300-80901 KIT.

<b>DART</b> AEROSPACE	
TITLE <b>TORQUE WRENCH ADAPTER</b>	
DWG NO. <b>269A3150-5-80904</b>	REV <b>2</b>
MAT'L STRESS PROOF	DRAWN BY: PERRITT
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	APPROVED <i>D Weil</i>
.XXX ± .005 .XX ± .01 .X ± .1	HEAT TREAT FINISH BLACK OXIDE
FRACTIONS ± 1/8 ANGLES ± 5°	SPEC
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	USED ON MODEL 269
SCALE 1:1	DATE 6/12/2006
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
				1	TORQUE WRENCH ADAPTER	STRESS PROOF		